

## ERRATUM

# Erratum to “All-Biobased Hydrovoltaic–Photovoltaic Electricity Generators for All-Weather Energy Harvesting”

Guoping Ren<sup>1</sup>, Qichang Hu<sup>1,2</sup>, Jie Ye<sup>1</sup>, Andong Hu<sup>1</sup>,  
Jian Lü<sup>1\*</sup>, and Shungui Zhou<sup>1\*</sup>

<sup>1</sup>College of Resources and Environment, Fujian Agriculture and Forestry University, Fuzhou, China.

<sup>2</sup>College of Mechanical and Electrical Engineering, Fujian Agriculture and Forestry University, Fuzhou, China.

\*Address correspondence to: [jian\\_lu\\_fafu@163.com](mailto:jian_lu_fafu@163.com) (J.L.); [sgzhou@fafu.edu.cn](mailto:sgzhou@fafu.edu.cn) (S.Z.)

In the Research Article, “All-Biobased Hydrovoltaic–Photovoltaic Electricity Generators for All-Weather Energy Harvesting” [1], the publisher inadvertently introduced an error in Fig. 2F. The power density on the  $y$ -axis was incorrectly labeled as ( $\text{mW}/\text{cm}^2$ ) instead of the correct ( $\text{mW}/\text{m}^2$ ). Figure 2F has now been corrected in the PDF and HTML (full text). The layout of the figure panels has also been updated for better readability.


**Citation:** Ren G, Hu Q, Ye J, Hu A, Lü J, Zhou S. Erratum to “All-Biobased Hydrovoltaic–Photovoltaic Electricity Generators for All-Weather Energy Harvesting”. *Research* 2024;7:0454. <https://doi.org/10.34133/research.0454>

Submitted 25 July 2024  
Accepted 25 July 2024  
Published 26 August 2024

Copyright © 2024 Guoping Ren et al. Exclusive licensee Science and Technology Review Publishing House. No claim to original U.S. Government Works. Distributed under a Creative Commons Attribution License 4.0 (CC BY 4.0).

## Reference

1. Ren G, Hu Q, Ye J, Hu A, Lü J, Zhou S. All-biobased hydrovoltaic–photovoltaic electricity generators for all-weather energy harvesting. *Research (Wash D C)*. 2022;2022:Article 9873203.

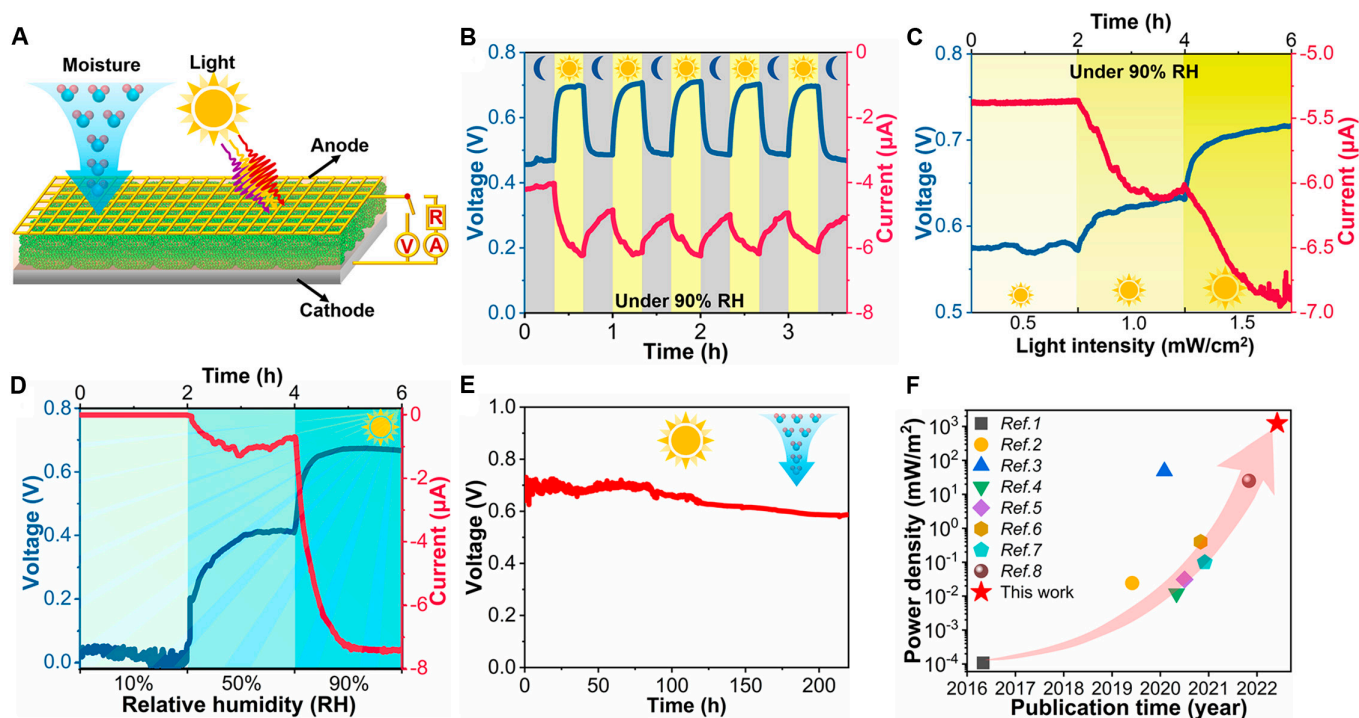

**Fig. 2.** Electric output performance of the G.s-PSII HPEG. (A) Schematic diagram of the HPEG to generate electricity. (B) Electric output of the HPEG responds to intermittent light–darkness at 90%RH, where the gray and yellow backgrounds are in darkness and light, respectively ( $25 \pm 2$ ) °C. (C) Continuous voltage and current measurements under different light intensities (0.5, 1.0, and 1.5  $\text{mW}/\text{cm}^2$ ) at 90%RH ( $25 \pm 2$ ) °C. (D) Continuous voltage and current measurements at different RHs (10%, 50%, and 90%RH) under a light intensity of 1.5  $\text{mW}/\text{cm}^2$  ( $25 \pm 2$ ) °C. (E) Long-time test of voltage under light at 90%RH and ( $25 \pm 2$ ) °C. (F) A comparison of the power density of this current device with those of the sustainable hydroelectricity generators in the literature (Table S1).